


# Product Specification

(64V 75Ah)



| Features  | Rated Performance                     |
|---|---------------------------------------|
| Rated Capacity  | 75Ah                                  |
| Minimum Capacity  | 73.5Ah                                |
| Nominal Voltage   | 64V                                   |
| Outgoing Voltage  | ≥64V                                  |
| Charging Voltage  | 72V                                   |
| Energy  | 4.8KWh                                |
| Voltage at End of Discharge                             | 52V                                   |
| Charging Protection Voltage                             | 73V                                   |
| Over Discharge Current                                  | 200A                                  |
| AC Impedance  | ≅ 50 mΩ                               |
| Standard Charge   | 15A                                   |
| Standard Discharge                                      | 15A                                   |
| Maximum Continuous Charge Current                       | 20A                                   |
| Maximum Continuous Discharge Current                    | 130A                                  |
| Operation Temperature Range<br><i>Humidity 60 ± 25%</i> | Charge: 0~45°C<br>Discharge: -20~60°C |
| Storage T/H Range                                       | -20~45°C/60 ±25%                      |
| Model Dimensions  | Length: 18.5in (470mm)                |
|   | Width: 13.5in (340mm)                 |
|   | Height: 6.75in (171mm)                |
| Weight  | 105.8lbs (48Kg)                       |

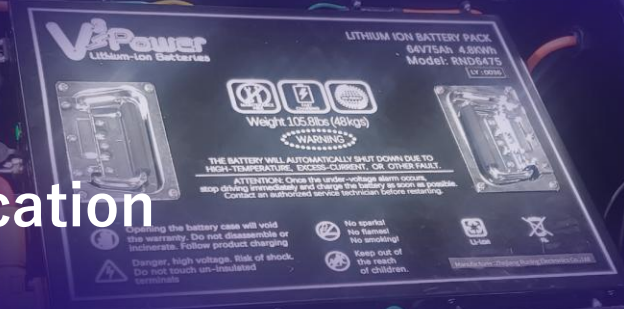